



1410

ULTRA SLIM
TWO WAY RADIO







VOX




USB Charging




Scrambler




Monitor




Dual PTT




Squelch Level




TOT




Battery Save




Long Standby



Busy Channel
Lock Out



Scan




Desktop Charging
(Optional)



General		Transmitter	
Frequency Range	UHF	Frequency Error	± 500Hz
Channel Capacity	16CH	TX Current	≤1.2A
Channel Spacing	12.5KHz/25KHz	TX Frequency Offset	4.3 ± 0.1KHz
Operating Voltage	3.3-4.2V DC		2.1 ± 0.1KHz
Battery Capacity	1500mAh (Li-Ion)	TX Power	400≥1.3W
Operating Temperature	-20℃ ~ +50℃		435≥1.3W
Frequency Stability	± 2.5ppm		469≥1.3W
Antenna Impedance	50Ω	CTCSS	0.6 ± 1KHz
Dimention	95X52X21.5mm	DCS	0.6 ± 1KHz
Weight	80g	Frequency Response	0.3KHz
Receiver			0.57KHz
RX Sensitivity	≤-121dB	TX SNR	> 50dB
SQ	-126 (OFF) , -123 (ON)	TX Modulation Distortion	≤5%
RX Frequency Response	0.3KHz	Adjacen Power Ratio	≤-66dB
	0.86V		
Audio Distortion	≤5%	All stated specifications are subject to change without notice or obligation.	
Speaker Max Output	1.4V ± 0.1V		

Product Overview	
1 • Microphone	8 • Channel -
2 • PTT Key	9 • Volume Key
3 • Breathing Light	10 • MIC Jack
4 • Speaker	11 • Earphone Jack
5 • Antenna	12 • USB Charging Port
6 • Side PTT Key	13 • Power On/Off
7 • Channel +	14 • Battery

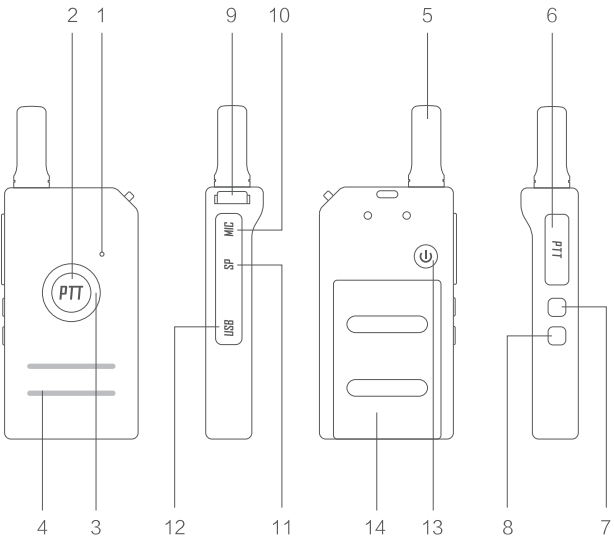

Fujian Senhaix Electronic Technology Co., Ltd

Fujian Senhaix Electronic Technology Co., Ltd. reserves the rights to change product designs and specifications without notice. All information has been seriously checked in order to be accurately. Our company does not take any responsibility if there is any consequence because of errors in printing or translation.


Company Address: No.7 Zihua Road, Jiangnan Hi-tech Industrial Zone, Licheng, Quanzhou, Fujian, China.

SenHaiX Belongs to legitimate trademark of Quanzhou Senhaixun Electronic Technology Co., Ltd.


1420

ULTRA SLIM
TWO WAY RADIO







VOX




USB Charging




Scrambler




Monitor




Dual PTT




Squelch Level




TOT




Battery Save




Long Standby



Busy Channel
Lock Out




Scan



Desktop Charging
(Optional)

General		Transmitter	
Frequency Range	UHF	Frequency Error	± 500Hz
Channel Capacity	16CH	TX Current	≤1.2A
Channel Spacing	12.5KHz/25KHz	TX Frequency Offset	4.3 ± 0.1KHz
Operating Voltage	3.3-4.2V DC		2.1 ± 0.1KHz
Battery Capacity	1500mAh (Li-Ion)	TX Power	400≥1.3W
Operating Temperature	-20℃ ~ +50℃		435≥1.3W
Frequency Stability	± 2.5ppm		469≥1.3W
Antenna Impedance	50Ω	CTCSS	0.6 ± 1KHz
Dimention	95X52X21.5mm	DCS	0.6 ± 1KHz
Weight	80g	Frequency Response	0.3KHz
Receiver			0.57KHz
RX Sensitivity	≤-121dB	TX SNR	> 50dB
SQ	-126 (OFF) , -123 (ON)	TX Modulation Distortion	≤5%
RX Frequency Response	0.3KHz	Adjacen Power Ratio	≤-66dB
	0.86V		
Audio Distortion	≤5%	All stated specifications are subject to change without notice or obligation.	
Speaker Max Output	1.4V ± 0.1V		

Product Overview	
1 • Microphone	8 • Channel -
2 • PTT Key	9 • Volume Key
3 • Breathing Light	10 • MIC Jack
4 • Speaker	11 • Earphone Jack
5 • Antenna	12 • USB Charging Port
6 • Side PTT Key	13 • Power On/Off
7 • Channel +	14 • Battery

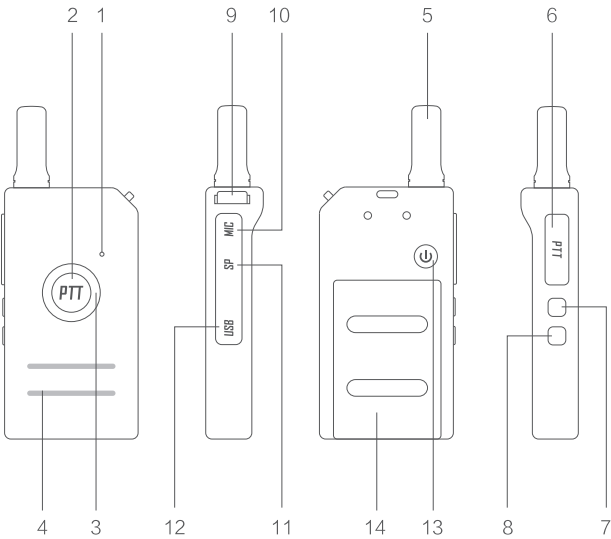

Fujian Senhaix Electronic Technology Co., Ltd

Fujian Senhaix Electronic Technology Co., Ltd. reserves the rights to change product designs and specifications without notice. All information has been seriously checked in order to be accurately. Our company does not take any responsibility if there is any consequence because of errors in printing or translation.


Company Address: No.7 Zihua Road, Jiangnan Hi-tech Industrial Zone, Licheng, Quanzhou, Fujian, China.

SenHaiX Belongs to legitimate trademark of Quanzhou Senhaixun Electronic Technology Co., Ltd.


1430

ULTRA SLIM
TWO WAY RADIO







VOX




USB Charging




Scrambler




Monitor




Dual PTT




Squelch Level




TOT




Battery Save




Long Standby



Busy Channel
Lock Out




Scan



Desktop Charging
(Optional)

General		Transmitter	
Frequency Range	UHF	Frequency Error	± 500Hz
Channel Capacity	16CH	TX Current	≤1.2A
Channel Spacing	12.5KHz/25KHz	TX Frequency Offset	4.3 ± 0.1KHz
Operating Voltage	3.3-4.2V DC		2.1 ± 0.1KHz
Battery Capacity	1500mAh (Li-Ion)	TX Power	400≥1.3W
Operating Temperature	-20℃ ~ +50℃		435≥1.3W
Frequency Stability	± 2.5ppm		469≥1.3W
Antenna Impedance	50Ω	CTCSS	0.6 ± 1KHz
Dimention	95X52X21.5mm	DCS	0.6 ± 1KHz
Weight	80g	Frequency Response	0.3KHz
Receiver			0.57KHz
RX Sensitivity	≤-121dB	TX SNR	> 50dB
SQ	-126 (OFF) , -123 (ON)	TX Modulation Distortion	≤5%
RX Frequency Response	0.3KHz	Adjacen Power Ratio	≤-66dB
	0.86V		
Audio Distortion	≤5%	All stated specifications are subject to change without notice or obligation.	
Speaker Max Output	1.4V ± 0.1V		

Product Overview	
1 • Microphone	8 • Channel -
2 • PTT Key	9 • Volume Key
3 • Breathing Light	10 • MIC Jack
4 • Speaker	11 • Earphone Jack
5 • Antenna	12 • USB Charging Port
6 • Side PTT Key	13 • Power On/Off
7 • Channel +	14 • Battery

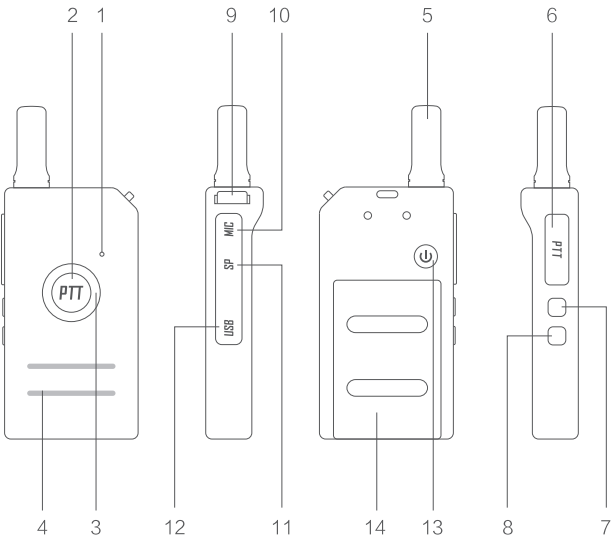

Fujian Senhaix Electronic Technology Co., Ltd

Fujian Senhaix Electronic Technology Co., Ltd. reserves the rights to change product designs and specifications without notice. All information has been seriously checked in order to be accurately. Our company does not take any responsibility if there is any consequence because of errors in printing or translation.


Company Address: No.7 Zihua Road, Jiangnan Hi-tech Industrial Zone, Licheng, Quanzhou, Fujian, China.


SenHaiX Belongs to legitimate trademark of Quanzhou Senhaixun Electronic Technology Co., Ltd.


1440


ULTRA SLIM
TWO WAY RADIO





- 


VOX
- 


USB Charging
- 


Scrambler
- 


Monitor
- 


Dual PTT
- 


Squelch Level
- 

TOT
- 

Battery Save
- 

Long Standby
- 


Busy Channel
Lock Out
- 

Scan
- 

Desktop Charging
(Optional)

General		Transmitter	
Frequency Range	UHF	Frequency Error	± 500Hz
Channel Capacity	16CH	TX Current	≤1.2A
Channel Spacing	12.5KHz/25KHz	TX Frequency Offset	4.3 ± 0.1KHz
Operating Voltage	3.3-4.2V DC		2.1 ± 0.1KHz
Battery Capacity	1500mAh (Li-Ion)	TX Power	400≥1.3W
Operating Temperature	-20℃ ~ +50℃		435≥1.3W
Frequency Stability	± 2.5ppm		469≥1.3W
Antenna Impedance	50Ω	CTCSS	0.6 ± 1KHz
Dimention	95X52X21.5mm	DCS	0.6 ± 1KHz
Weight	80g	Frequency Response	0.3KHz
Receiver			0.57KHz
RX Sensitivity	≤-121dB	TX SNR	> 50dB
SQ	-126 (OFF) , -123 (ON)	TX Modulation Distortion	≤5%
RX Frequency Response	0.3KHz	Adjacen Power Ratio	≤-66dB
	0.86V		
Audio Distortion	≤5%	All stated specifications are subject to change without notice or obligation.	
Speaker Max Output	1.4V ± 0.1V		

Product Overview	
1 • Microphone	8 • Channel -
2 • PTT Key	9 • Volume Key
3 • Breathing Light	10 • MIC Jack
4 • Speaker	11 • Earphone Jack
5 • Antenna	12 • USB Charging Port
6 • Side PTT Key	13 • Power On/Off
7 • Channel +	14 • Battery

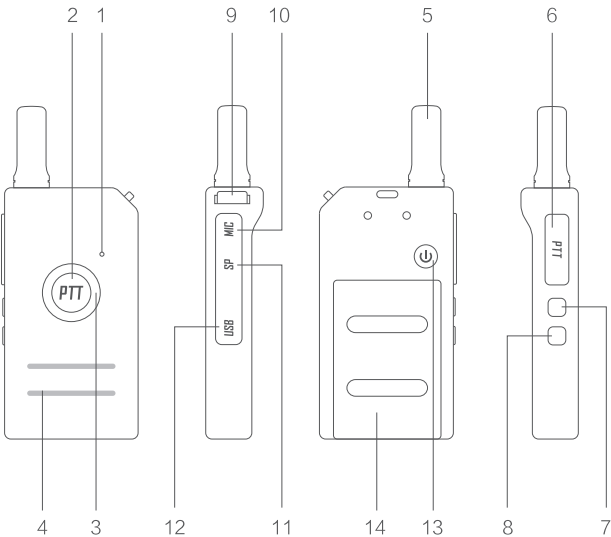

Fujian Senhaix Electronic Technology Co., Ltd

Fujian Senhaix Electronic Technology Co., Ltd. reserves the rights to change product designs and specifications without notice. All information has been seriously checked in order to be accurately. Our company does not take any responsibility if there is any consequence because of errors in printing or translation.

Company Address: No.7 Zihua Road, Jiangnan Hi-tech Industrial Zone, Licheng, Quanzhou, Fujian, China.

SenHaiX Belongs to legitimate trademark of Quanzhou Senhaixun Electronic Technology Co., Ltd.